
optoma.nl



ZU820T

Ultra bright professional installation laser projector

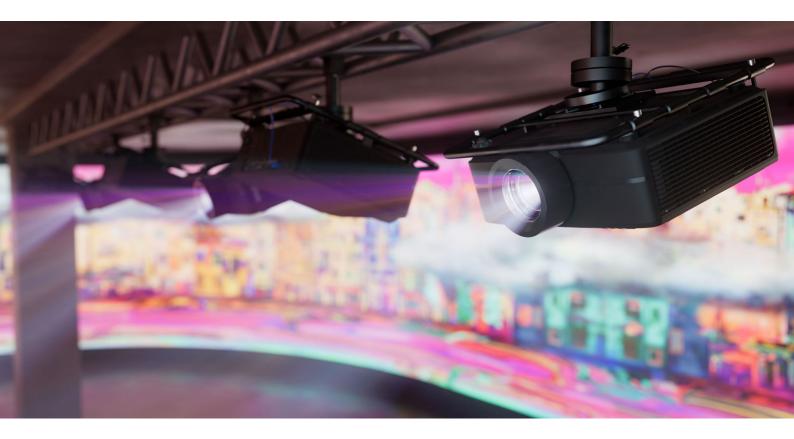

- 8800 lumen DuraCore laser projector Ultra bright for immersive installations
- Full motorised lens shift Ideal for a simple set-up
- Large zoom range Motorised zoom expands placement opportunities
- Long life Delivers 30,000 hours of virtually maintenance-free operation



At 8800 lumens with 4K and HDR compatibility, the ZU820T features a dust-resistant IP5X certified optical engine for 24/7 operation capabilities, offering true maintenance-free projection for up to 30,000 hours of powerful performance in Eco mode. Other features include motorized zoom and focus, full motorized lens shift, and built-in dual 10W speakers.

High brightness, color precision and quiet operation, alongside a 1.6x zoom make this projector the ideal solution for a variety of end-user scenarios and professional environments, such as simulation, edge-blending and projection mapping, and immersive installations.

Specifications

LIPC: 796/35 // 601 7 EAN: 50553876662/15 Colour: Black		
	UPC: 796435 44 601 7, EAN: 5055387666245, Colour: Black Display/image	
Display/image		
Display technology	DLP	
Resolution	WUXGA (1920x1200)	
Brightness	8.800 lumens	
ANSI brightness	7.400	
Contrast ratio	3.000.000:1	
Contrast ratio - full on/off	1.100:1	
lative aspect ratio	16:10	
spect ratio - compatible	4:3,16:9,16:10	
Keystone correction -	30°	
orizontal	222	
Keystone correction - vertical	30°	
Jniformity	95%	
creen size	1.27m ~ 7.62m (50" ~ 300") diagonal	
amp info		
ight source type	DuraCore Laser	
ASER life	30.000 hours	
ptical		
hrow ratio	1.25:1 ~ 2:1	
rojection distance (m)	1.33m - 13.06m	
oom	1.6	
oom type	Motorised	
ocal length (mm)	18.72~29.59	
ens shift	Vertical: +/-55%, Horizontal: +/-25%	
ens shift	Yes - {{downloads_link}}	
connectivity		
Connections		
Jonnections	Inputs 1 x HDBaseT, 1 x HDMI 2.0, 1 x HDMI 1.4a 3D	
Joinie Cuona	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm	
	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A,	
	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm	
	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x	
onnections	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm	
	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x	
AN - wireless networking	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232	
AN - wireless networking	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232	
AN - wireless networking teneral oise level (typical) oise level (max)	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB	
AN - wireless networking Teneral loise level (typical) loise level (max)	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D	
AN - wireless networking Teneral loise level (typical) loise level (max) D recurity	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB	
AN - wireless networking teneral loise level (typical) loise level (max) D ecurity	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 10 languages: English, French, German, Italian, Portuguese,	
AN - wireless networking ieneral loise level (typical) loise level (max) D ecurity ISD / display languages	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 10 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional)	
AN - wireless networking ieneral oise level (typical) oise level (max) D ecurity SD / display languages 4/7 operation	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 10 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes	
AN - wireless networking aeneral loise level (typical) loise level (max) D security SSD / display languages 4/7 operation 60° operation	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 10 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Yes	
AN - wireless networking General Joise level (typical) loise level (max) D Decurity OSD / display languages 4/7 operation 60° operation Remote control	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 10 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Yes Backlit ProAV remote	
AN - wireless networking teneral loise level (typical) loise level (max) D ecurity ISD / display languages 4/7 operation 60° operation temote control	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 10 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Yes Backlit ProAV remote 2	
AN - wireless networking teneral loise level (typical) loise level (max) D ecurity SD / display languages 4/7 operation 60° operation temote control peaker count /atts per speaker	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 10 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Yes Backlit ProAV remote	
AN - wireless networking teneral loise level (typical) loise level (max) D ecurity ISD / display languages 4/7 operation 60° operation lemote control peaker count /atts per speaker letworking	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 10 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Backlit ProAV remote 2	
AN - wireless networking eneral oise level (typical) oise level (max) D ecurity SD / display languages 4/7 operation 60° operation emote control peaker count fatts per speaker etworking	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 10 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Backlit ProAV remote 2	
AN - wireless networking eneral oise level (typical) oise level (max) D ecurity SD / display languages 4/7 operation 50° operation emote control peaker count fatts per speaker etworking AN - wireless networking	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 10 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Backlit ProAV remote 2 10W	
AN - wireless networking Seneral oise level (typical) oise level (max) D ecurity SD / display languages 4/7 operation 60° operation emote control peaker count /atts per speaker Setworking AN - wireless networking AN	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 10 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Backlit ProAV remote 2 10W	
AN - wireless networking ieneral oise level (typical) oise level (max) D ecurity SD / display languages 4/7 operation 60° operation emote control peaker count fatts per speaker etworking AN - wireless networking AN	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 10 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Backlit ProAV remote 2 10W	
AN - wireless networking teneral loise level (typical) loise level (max) D ecurity ISD / display languages 4/7 operation 60° operation temote control peaker count /// atts per speaker letworking AN - wireless networking AN	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 10 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Yes Backlit ProAV remote 2 10W No Yes	
AN - wireless networking teneral loise level (typical) loise level (max) D ecurity ISD / display languages 4/7 operation 60° operation temote control peaker count /atts per speaker letworking AN - wireless networking AN ower ower supply ower consumption (standby)	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 10 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Yes Backlit ProAV remote 2 10W No Yes AC 90 – 264V 50/60 Hz with PFC input	
AN - wireless networking ieneral loise level (typical) loise level (max) D iecurity SD / display languages 4/7 operation 60° operation	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 10 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Yes Backlit ProAV remote 2 10W No Yes AC 90 – 264V 50/60 Hz with PFC input 0.5W	
AN - wireless networking teneral loise level (typical) loise level (max) D ecurity SD / display languages 4/7 operation 60° operation lemote control peaker count /atts per speaker letworking AN - wireless networking AN - wireless networking AN Power ower supply ower consumption (standby) ower consumption (max)	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 10 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Backlit ProAV remote 2 10W No Yes AC 90 – 264V 50/60 Hz with PFC input 0.5W 260W	
AN - wireless networking teneral oise level (typical) oise level (max) D ecurity SD / display languages 4/7 operation 60° operation emote control peaker count /atts per speaker letworking AN - wireless networking AN - wireless networking	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 10 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Backlit ProAV remote 2 10W No Yes AC 90 – 264V 50/60 Hz with PFC input 0.5W 260W	
AN - wireless networking deneral loise level (typical) loise level (max) D decurity SD / display languages 4/7 operation 60° operation demote control speaker count Vatts per speaker letworking AN - wireless networking AN - ower supply tower consumption (standby) tower consumption (min)	support, 1 x VGA, 1 x 3D sync, 1 x Audio 3.5mm Outputs 1 x HDMI 2.0, 1 x 3D sync, 1 x USB-A power 1.5A, 1 x Audio 3.5mm Control 1 x 12V trigger, 1 x Wired remote, 1 x RJ45, 1 x RS232 No 34dB 36dB Full 3D Security bar, Kensington Lock 10 languages: English, French, German, Italian, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes Yes Backlit ProAV remote 2 10W No Yes AC 90 – 264V 50/60 Hz with PFC input 0.5W 260W 520W	







Copyright © 2023, Optoma and its logo is a registered trademark of Optoma Corporation. Optoma Europe Ltd is the licensee of the registered trademark. All other product names and company names used herein are for identification purposes only and may be trademarks or registered trademarks of their respective owners. Errors and omissions excepted, all specifications are subject to change without notice. All images are for representation purposes only and may be simulated. 23032023064031